


Coverage chart n ≈ 2900 rpm

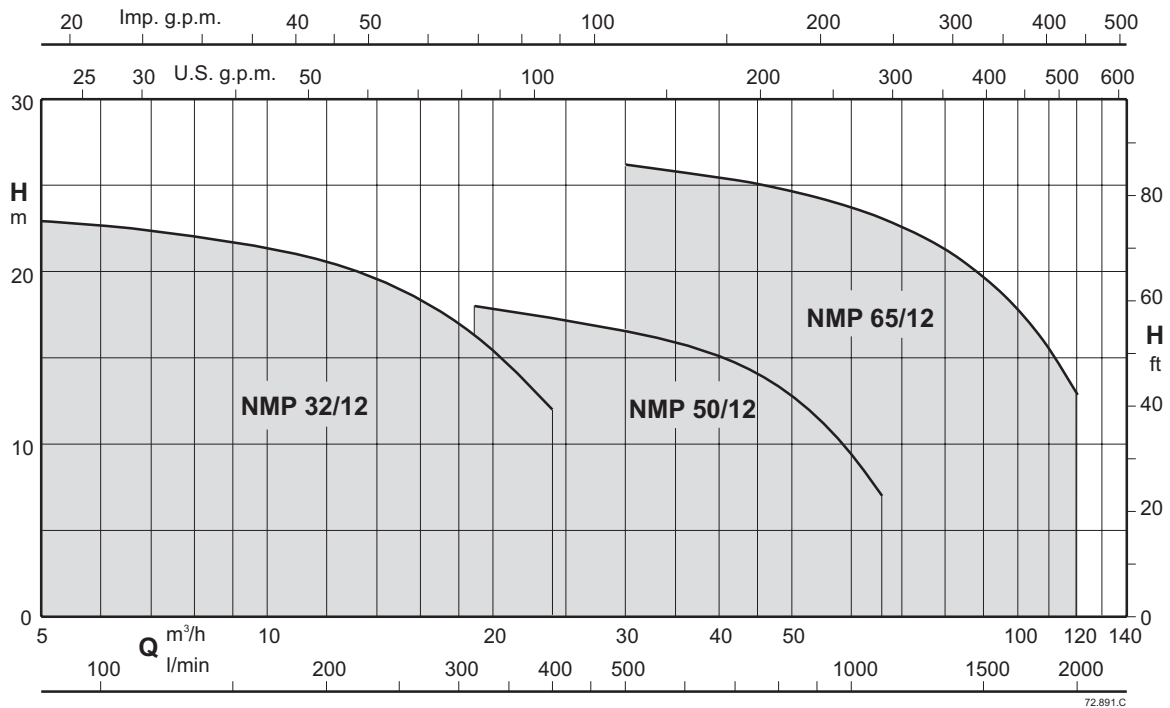

Self-priming pumps
with built-in strainer

Construction

Close-coupled self-priming centrifugal pumps with built-in strainer.
Inner basket with Ø 3 mm holes.

NMP: version with pump casing and lantern bracket in cast iron, with cathaphoresis coating.

BNMP: version with pump casing and lantern bracket in bronze.
The pumps are supplied fully painted.

Applications

For water circulation in swimming pool filtration systems.
For clean or slightly dirty water with solids in suspension.

Operating conditions

Water temperature up to 60 °C.
Ambient temperature up to 40° C.
Total suction lift up to 7 m.
Maximum permissible working pressure up to 6 bar.
Continuous duty (S3 60% for single-phase pump to 1,5 kW).

Motor

2-pole induction motor, 50 Hz ($n \approx 2900$ rpm).

NMP: three-phase 230/400 V $\pm 10\%$, fino a 3 kW
400/690 V $\pm 10\%$, da 4 a 7,5 kW;

NMPM: single-phase 230 V $\pm 10\%$, with thermal protector.
Insulation class F.

Protection IP X4.

IE2 efficiency class for single-phase motors up to 1,1 kW.

IE3 efficiency class for three-phase motors (IE2 up to 0,65 kW).

Constructed in accordance with EN 60034-1.

EN 60335-1, EN 60335-2-41.

Special features on request

Other voltages.

Frequency 60 Hz (as per 60 Hz data sheet).

IP protection: IP55

Special mechanical seal

Higher liquid or ambient temperatures.

Designation

Example: BNMPM 50/12G/A

NMP = Series

B = Bronze version (without Cast Iron version indication)

M = Singlephase version (no indication: threephase)

50 = Delivery port diameter in mm

12 = Nominal impeller diameter

G = Impeller diameter

/A = It refers to a revision

Materials

Components	NMP	BNMP
Pump casing	Cast iron GJL 200 EN 1561	Bronze CC480K EN 1982
Lantern bracket	Cast iron GJL 200 EN 1561	Bronze CC480K EN 1982
Impeller	Cast iron GJL 200 EN 1561	Bronze CC480K EN 1982
	Brass with chrome-plated surface P-Cu Zn 40 Pb 2 UNI 5705 for NMP 32/12	Brass with chrome-plated surface P-Cu Zn 40 Pb 2 UNI 5705 for BNMP 32/12
Shaft	Chrome-nickel steel 1.4305 EN 10088 (AISI 303)	Steel 1.4401 EN 10088 (AISI 316)
Strainer cover	Cast iron GJL 200 EN 1561	Bronze CC480K EN 1982
Filter	Chrome-nickel steel 1.4301 EN 10088 (AISI 304)	Chrome-nickel steel 1.4301 EN 10088 (AISI 304)
Mechanical seal	Carbon - Ceramic - FPM	Carbon - Ceramic - FPM

Coverage chart n ≈ 2900 rpm

Three-phase

						Q = Flow																				
						m³/h	0	6,6	9,6	10,8	12	13,2	15	18,9	21	24	30	42	48	54	60	66	75	84	96	108
Model	230V	400V	P2		l/min	110	160	180	200	220	250	315	350	400	500	700	800	900	1000	1100	1250	1400	1600	1800	2000	
		A	kW	HP	H (m) = Total head																					
BNMP	NMP 32/12FE	4	2,3	0,55	0,75	13	13	12	11	10,5	10	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BNMP	NMP 32/12DE	4	2,3	0,75	1	18	18	17	16	15,5	15	14	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BNMP	NMP 32/12A/A	4,6	2,7	1,1	1,5	22,4	22	21	20,5	20	19,5	18,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BNMP	NMP 32/12S/A	7,5	4,3	1,5	2	23	22,5	21,5	21	20,5	20	19	16	15	12	-	-	-	-	-	-	-	-	-	-	-
BNMP	NMP 50/12H/A	4,6	2,7	1,1	1,5	10,2	-	-	-	-	-	9	9	8,5	7,5	5,5	4,5	3	-	-	-	-	-	-	-	-
BNMP	NMP 50/12G/A	7,5	4,3	1,5	2	12,9	-	-	-	-	-	12	12	11,5	10,5	8	7	5	3,5	-	-	-	-	-	-	-
BNMP	NMP 50/12F/B	9,2	5,3	2,2	3	16,8	-	-	-	-	-	16	16	15,5	14,5	12	10,5	8,5	6,5	5	-	-	-	-	-	-
BNMP	NMP 50/12D/A	11,5	6,6	3	4	19	-	-	-	-	-	18	18	17,5	16,5	15	13	11,5	9,5	7	-	-	-	-	-	-
BNMP	NMP 65/12E	-	9,6	4	5,5	19,6	-	-	-	-	-	-	-	-	17,7	16,5	15,9	15,2	14,4	13,6	12,2	10,7	8,5	6,1	-	-
BNMP	NMP 65/12C	-	10,8	5,5	7,5	23,1	-	-	-	-	-	-	-	-	21,4	20,5	19,5	19,3	18,6	17,8	16,6	15,2	13,1	10,6	7,3	-
BNMP	NMP 65/12A	-	14,3	7,5	10	28,4	-	-	-	-	-	-	-	-	26,2	25,3	24,8	24,3	23,7	23,1	22	20,7	18,6	16	12,9	-

Single-phase

						Q = Flow																				
						m³/h	0	6,6	9,6	10,8	12	13,2	15	18,9	21	24	30	42	48	54	60					
Model	230V	P2		P1	l/min	110	160	180	200	220	250	315	350	400	500	700	800	900	1000							
		A	kW	HP	kW	H (m) = Total head																				
BNMPM	NMPM 32/12FE	4,5	0,55	0,75	0,78	13	12	11	10	9,5	9	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BNMPM	NMPM 32/12DE	5,8	0,75	1	1,01	17,4	17	16	15	14,5	14	13	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BNMPM	NMPM 32/12AE	7,4	1,1	1,5	1,44	22,1	21,5	20,5	19,5	19	18,5	17,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BNMPM	NMPM 32/12SE	9,2	1,5	2	2	23	22,5	21,5	21	20,5	20	19	16	15	12	-	-	-	-	-	-	-	-	-	-	-
BNMPM	NMPM 50/12HE	7,4	1,1	1,5	1,44	10,2	-	-	-	-	-	-	9	9	8,5	7,5	5,5	4,5	3	-	-	-	-	-	-	-
BNMPM	NMPM 50/12GE	9,2	1,5	2	2	12,9	-	-	-	-	-	-	12	12	11,5	10,5	8	7	5	3,5	-	-	-	-	-	-


P1: Maximum power input.

P2: Rated motor power output.

H: Total head in m

Tolerances according to UNI EN ISO 9906:2012

Dimensions and weights

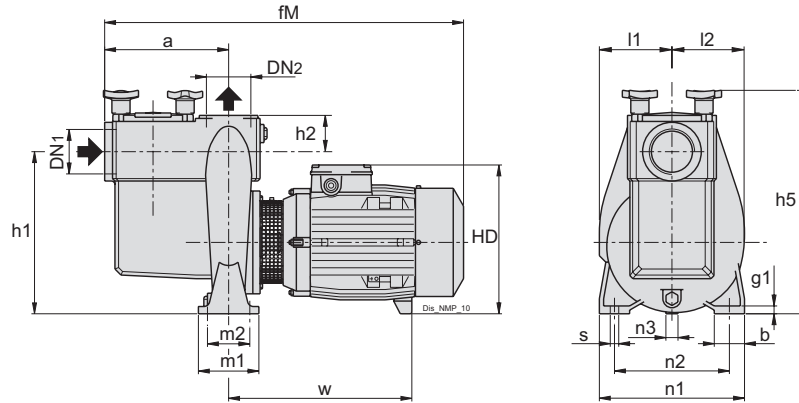

TYPE	ISO 228		mm																	kg
	DN1	DN2	a	b	fM	g1	h1	h2	h5	HD	l1	l2	m1	m2	n1	n2	n3	s	w	
NMP 32/12FE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	28.3
NMP 32/12DE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	28.5
NMP 32/12A/A	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	32
NMP 32/12S/A	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	32
NMP 50/12H/A	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	35.8
NMP 50/12G/A	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	37.3
NMP 50/12F/B	G2 1/2	G2 1/2	205	50	580	12	262	60	370	240	120	117	100	70	240	190	37	14	274	40.8
NMP 50/12D/A	G2 1/2	G2 1/2	205	50	602	12	262	60	370	250	120	117	100	70	240	190	20	14	298	47.7
NMP 65/12E	G 3	G 3	320	65	724	15	360	80	480	298	157	159	125	95	280	212	60	14	303	73.9
NMP 65/12C	G 3	G 3	320	65	785	15	360	80	466	326	157	158	125	95	280	212	34	14	336	87.8
NMP 65/12A	G 3	G 3	320	65	785	15	360	80	466	326	157	158	125	95	280	212	34	14	336	92.2

TYPE	ISO 228		mm																	kg
	DN1	DN2	a	b	fM	g1	h1	h2	h5	HD	l1	l2	m1	m2	n1	n2	n3	s	w	
NMPM 32/12FE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	29.7
NMPM 32/12DE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	32
NMPM 32/12AE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	-
NMPM 32/12SE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	33.8
NMPM 50/12HE	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	-
NMPM 50/12GE	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	37.7

TYPE	ISO 228		mm																	kg
	DN1	DN2	a	b	fM	g1	h1	h2	h5	HD	l1	l2	m1	m2	n1	n2	n3	s	w	
BNMP 32/12FE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	32.6
BNMP 32/12DE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	32.9
BNMP 32/12A/A	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	35.1
BNMP 32/12S/A	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	36.7
BNMP 50/12H/A	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	40.6
BNMP 50/12G/A	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	41.7
BNMP 50/12F/B	G2 1/2	G2 1/2	205	50	580	12	262	60	370	240	120	117	100	70	240	190	37	14	274	46.2
BNMP 50/12D/A	G2 1/2	G2 1/2	205	50	602	12	262	60	370	250	120	117	100	70	240	190	20	14	298	51.5
BNMP 65/12E	G 3	G 3	320	65	724	15	360	80	480	298	157	159	125	95	280	212	60	14	303	86.6
BNMP 65/12C	G 3	G 3	320	65	785	15	360	80	466	326	157	158	125	95	280	212	34	14	336	98.3
BNMP 65/12A	G 3	G 3	320	65	785	15	360	80	466	326	157	158	125	95	280	212	34	14	336	103.5

TYPE	ISO 228		mm																	kg
	DN1	DN2	a	b	fM	g1	h1	h2	h5	HD	l1	l2	m1	m2	n1	n2	n3	s	w	
BNMPM 32/12FE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	33.7
BNMPM 32/12DE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	-
BNMPM 32/12AE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	-
BNMPM 32/12SE	G2	G2	195	50	510	12	230	50	330	228	106	99	100	70	190	140	30	14	220	37
BNMPM 50/12HE	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	-
BNMPM 50/12GE	G2 1/2	G2 1/2	205	50	540	12	262	60	370	240	120	117	100	70	240	190	37	14	234	41.9

Characteristic curves $n \approx 2900$ rpm

