




# HYDRO SOLO-E OPTIMUM



3×380-500 = max. 50 °C  
3×200-240 = max. 40 °C

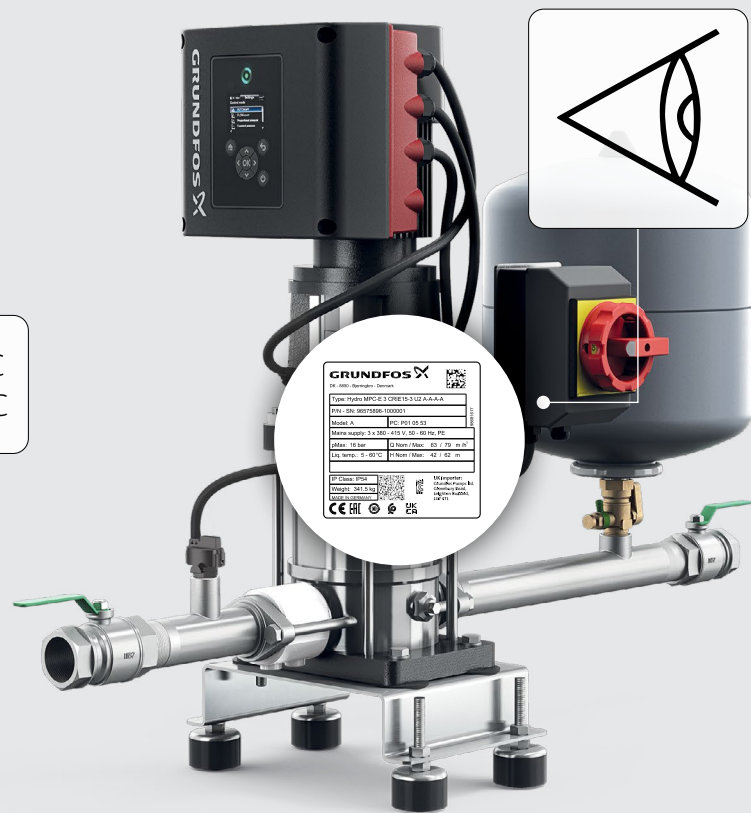

#### Factory settings

| Date | Setting (SP) |
|------|--------------|
|      |              |


#### Customer settings

| Date | Setting (SP) | Initials |
|------|--------------|----------|
|      |              |          |
|      |              |          |
|      |              |          |
|      |              |          |
|      |              |          |
|      |              |          |
|      |              |          |
|      |              |          |
|      |              |          |





P = 0.7 × SP

P = 0 bar



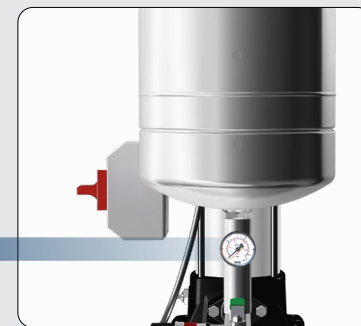




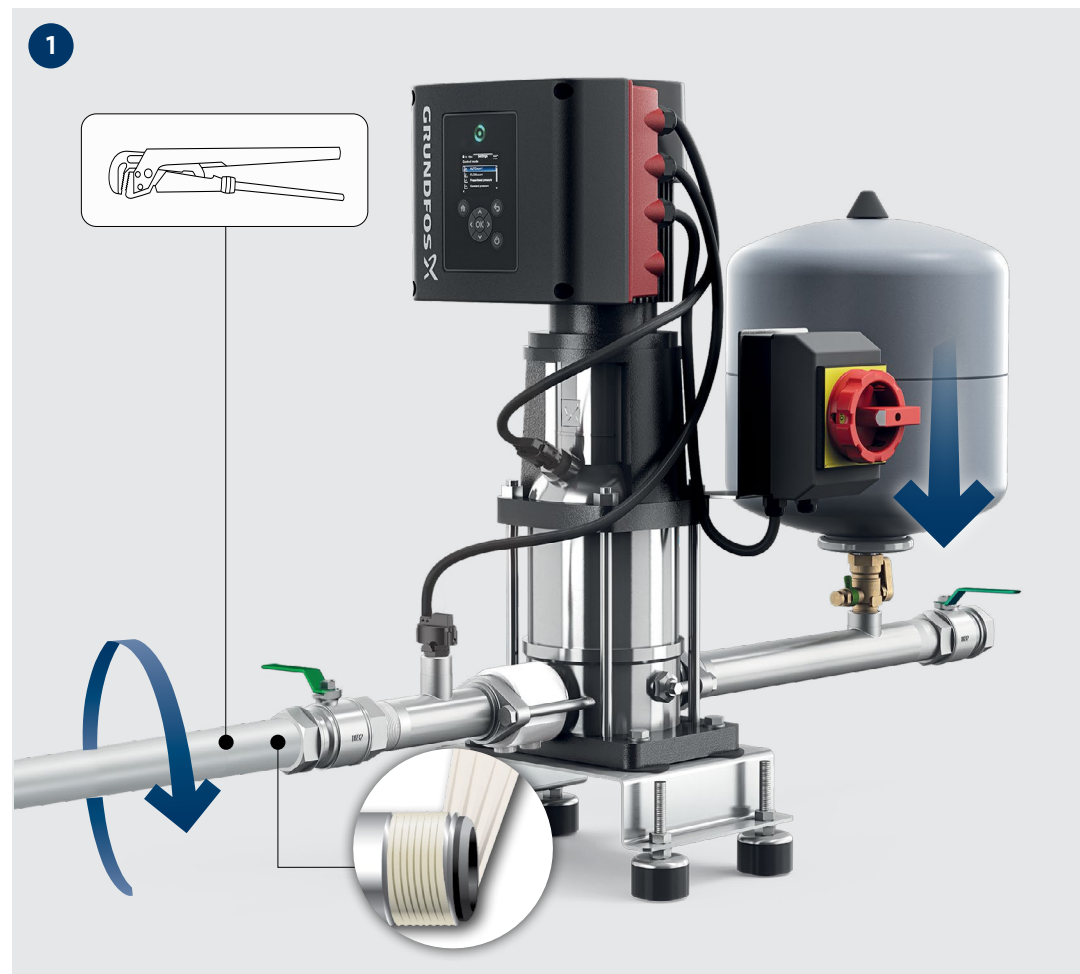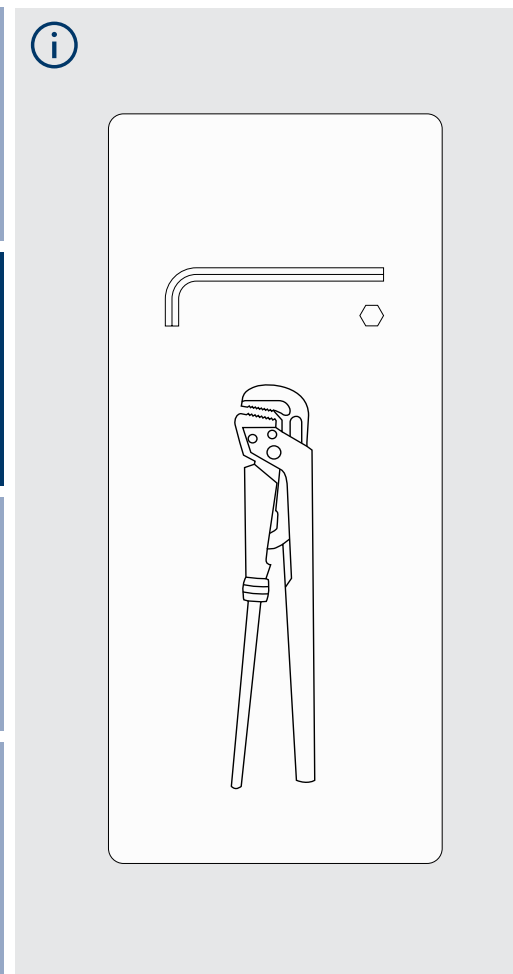





i

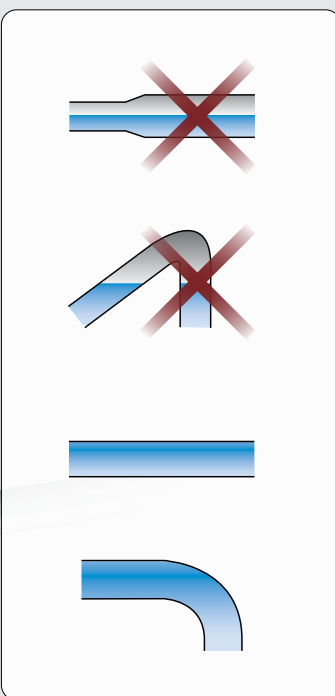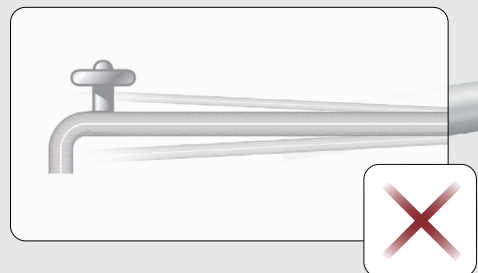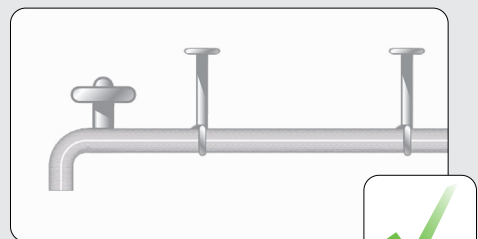

3

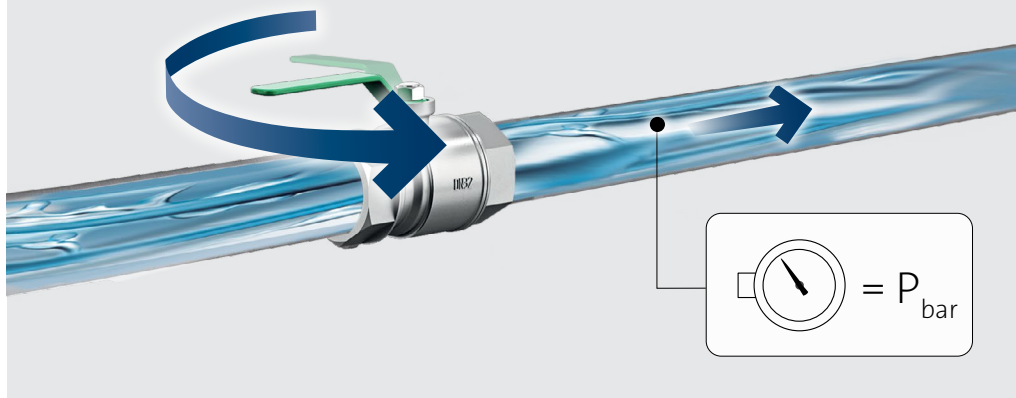


4

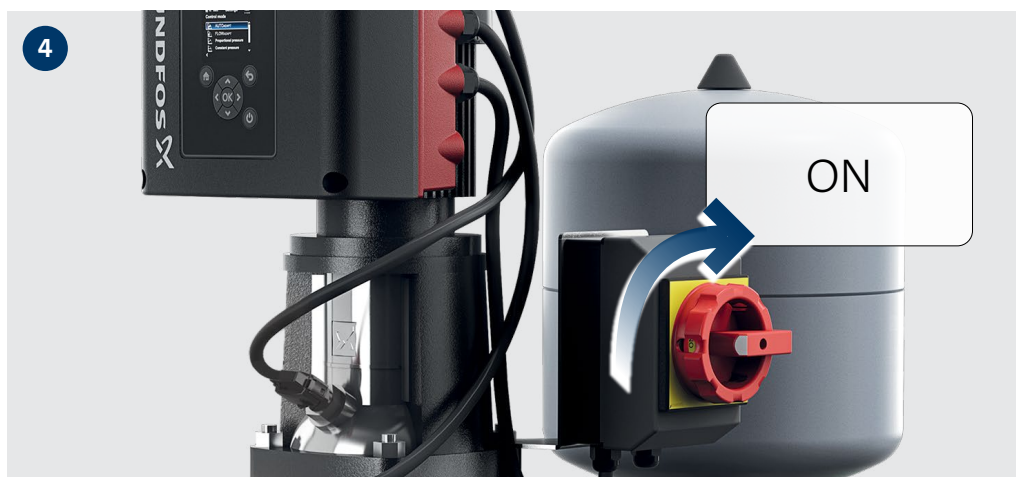




OPTIONAL

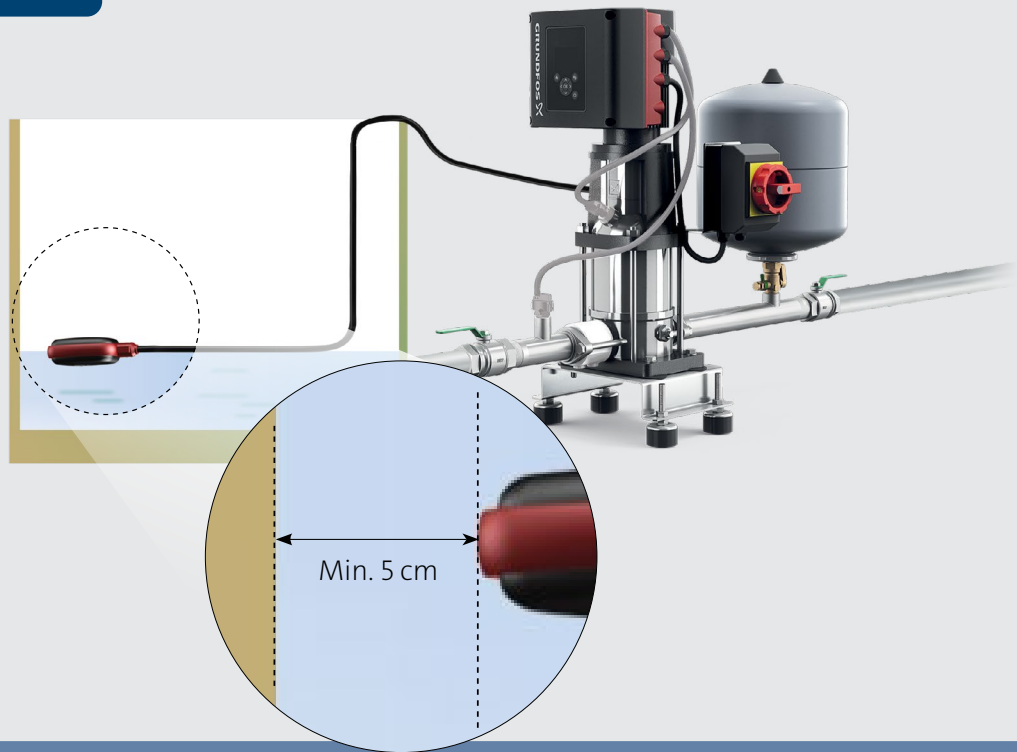


A



1/On




0/Off



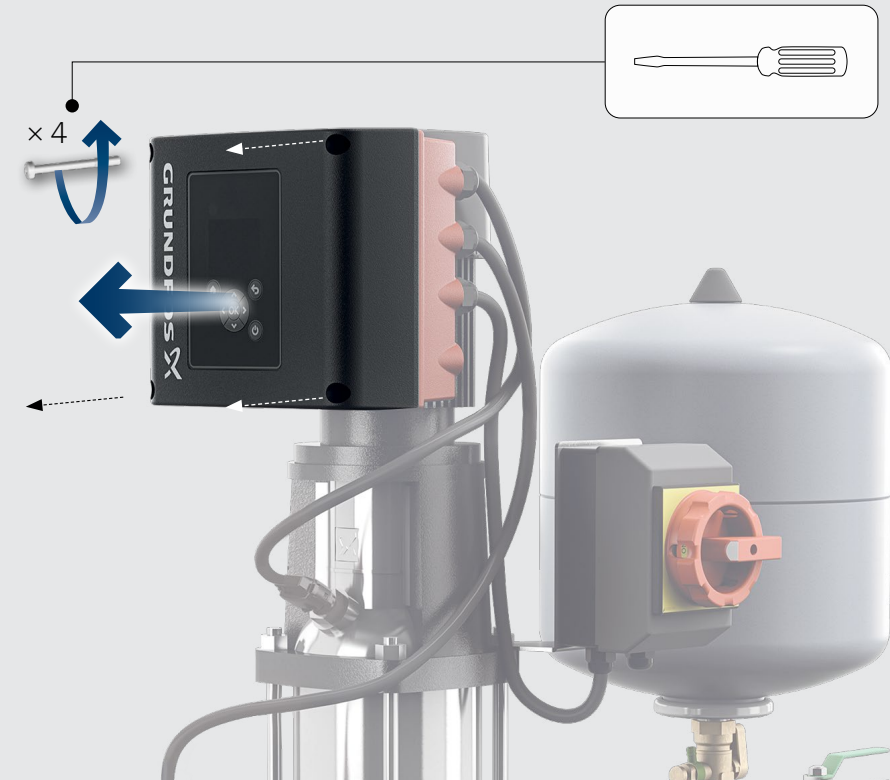









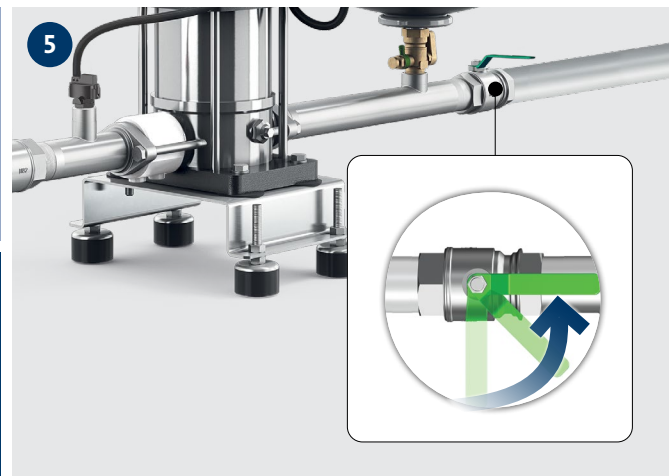

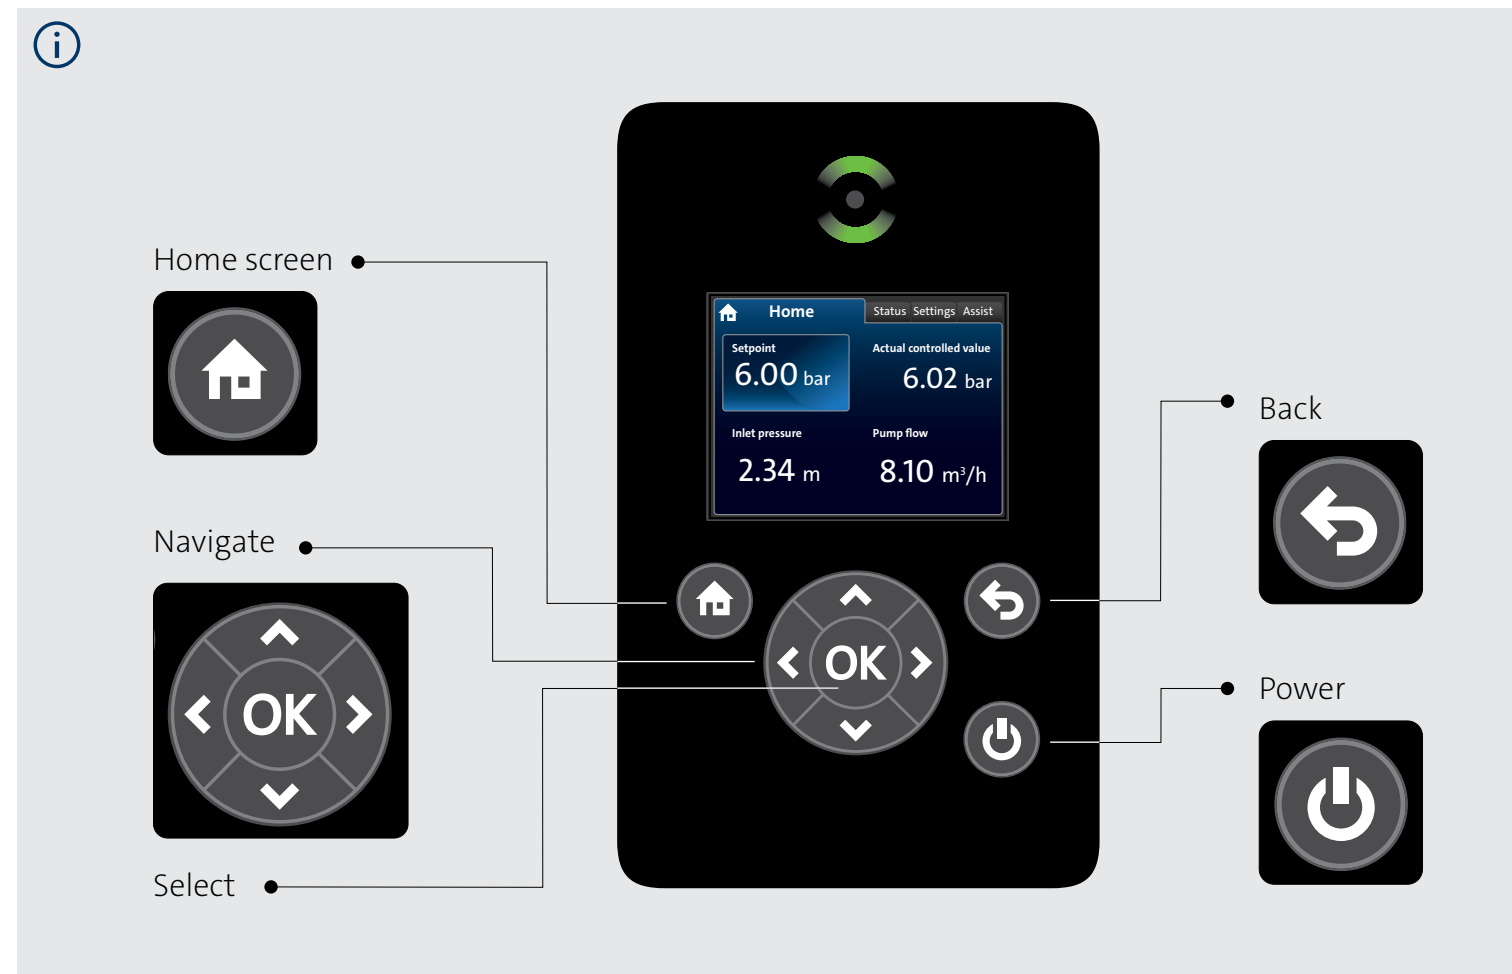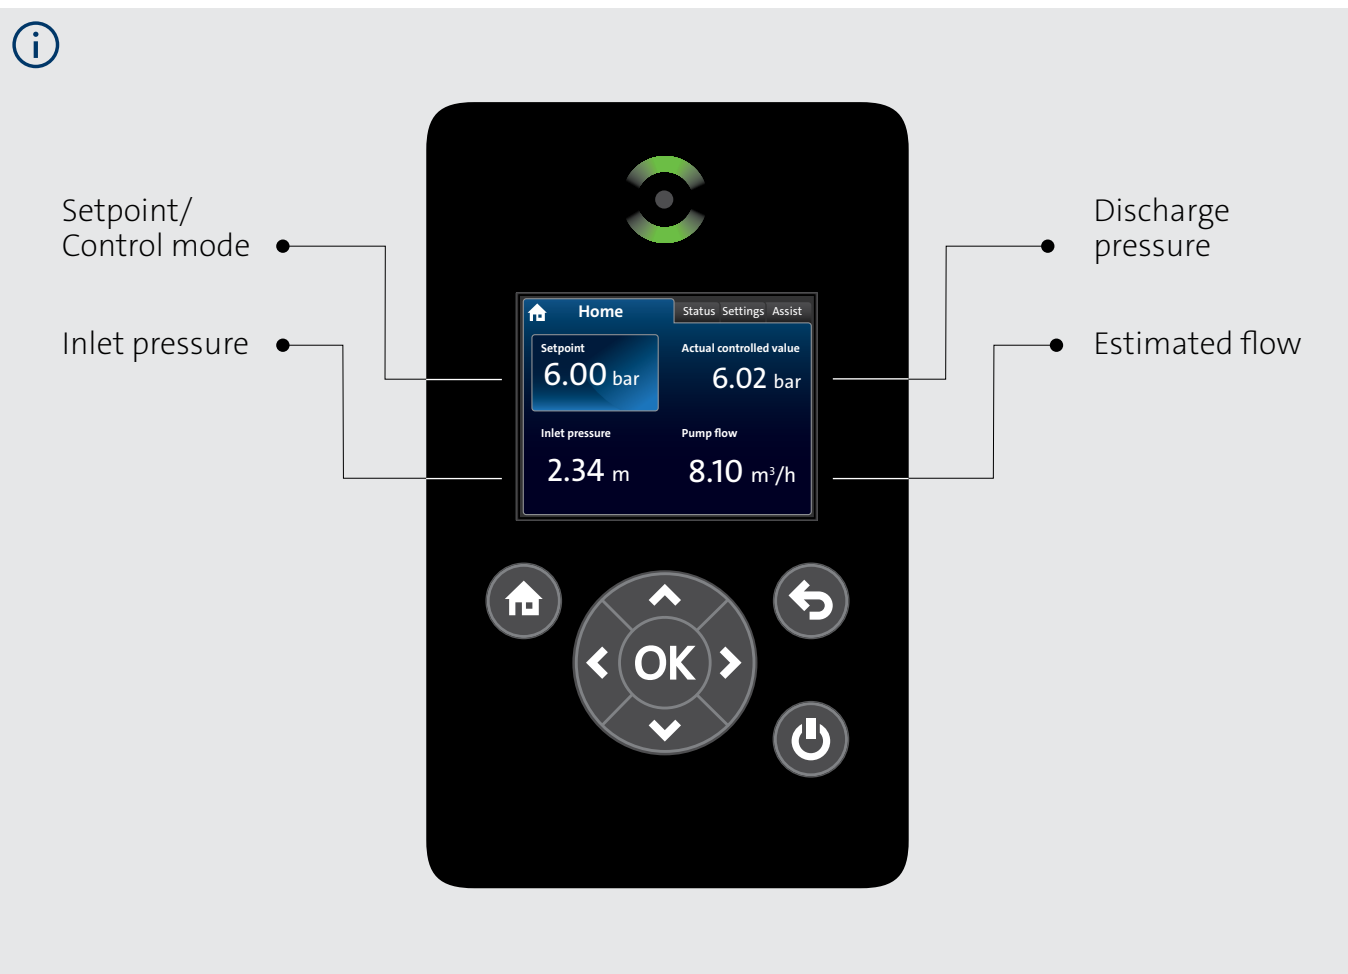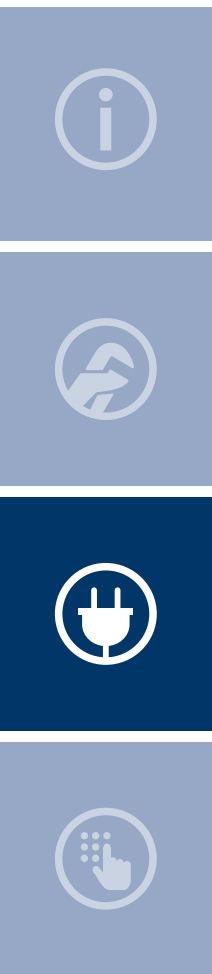



10

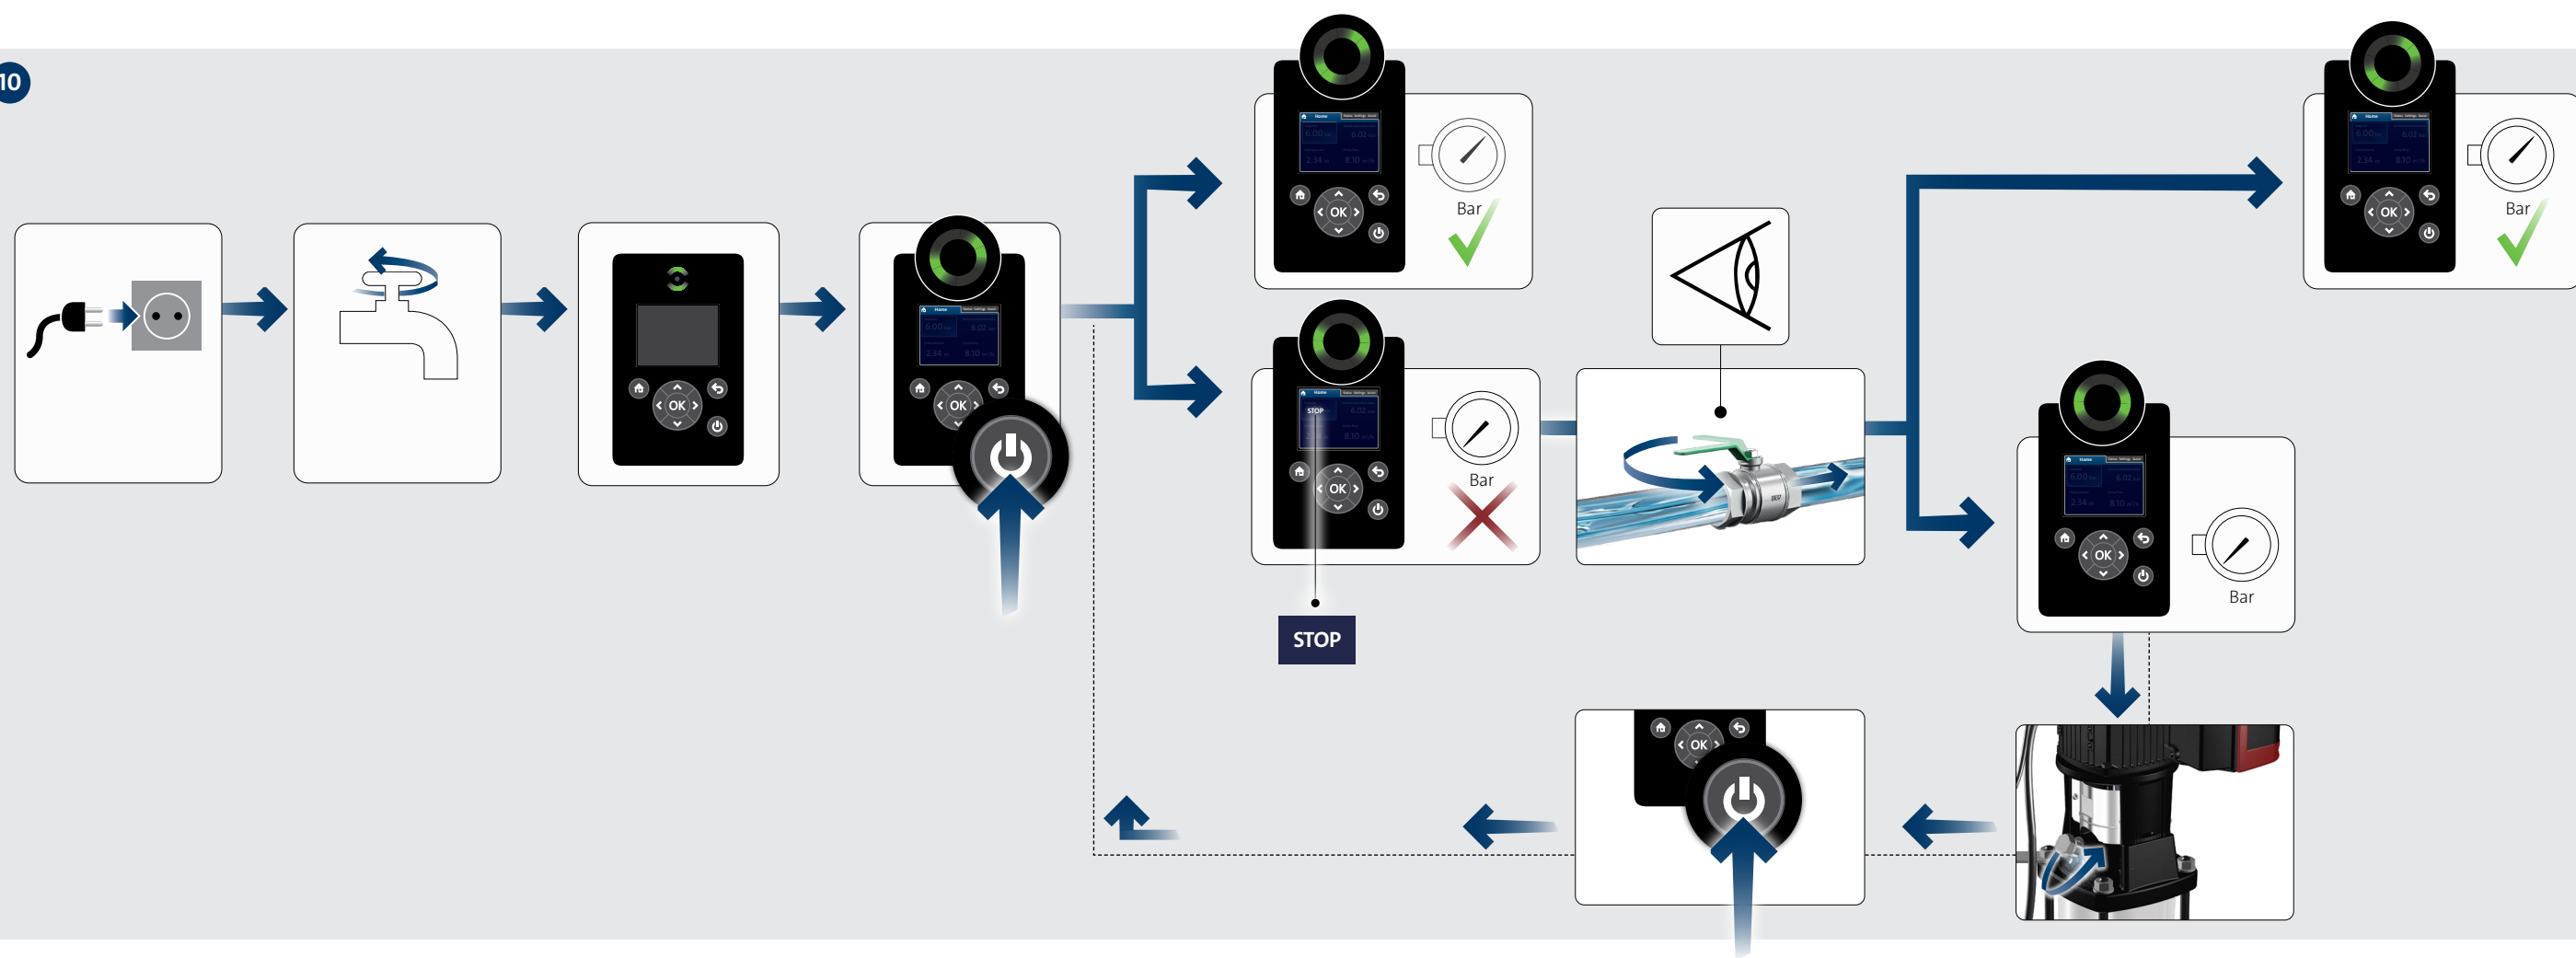







13





99838821 03.2025

ECM: 1415400

**GRUNDFOS Holding A/S**  
Poul Due Jensens Vej 7  
DK-8850 Bjerringbro  
Tel: +45 87 50 14 00  
[www.grundfos.com](http://www.grundfos.com)

**GRUNDFOS**

The name Grundfos, the Grundfos logo are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.